



Adsorber VG-D

Versatile Use | Easy Maintenance | Cost-Effective



DESIGNED AND PRODUCED IN GERMANY



Barrels & IBC



Hydraulic power packs



Gears







	VG-D 1L	VG-D 2L	VG-D 3M	VG-D 3L	VG-D 5L	VG-D 5XL
Total Weight [kg]	0,2	0,8	1,3	1,8	3,6	4,6
Weight Activated Carbon [kg]	0,1	0,3	0,5	0,9	2,2	3,0
Height [mm]	141	210	226	326	364	464
Diameter [mm]	60/63	90/94	110/114	110/114	150/154	150/154
Connection	BSP, NPT, Metric	BSP, NPT, Metric, Slipfit	BSP, NPT, Metric, Slipfit	BSP, NPT, Metric, Slipfit	BSP, NPT, Metric, Slipfit	BSP, NPT, Metric, Slipfit
Valves [IN - OUT]	0 - 0	0 - 0	0 - 0	0 - 0	0 - 0	0 - 0




GIEBEL Adsorber®

...setting standards in aeration drying!

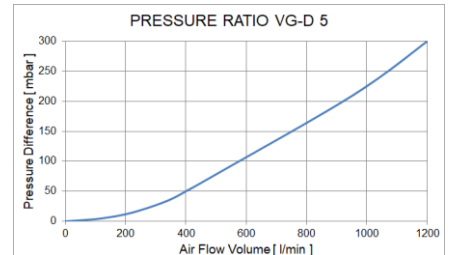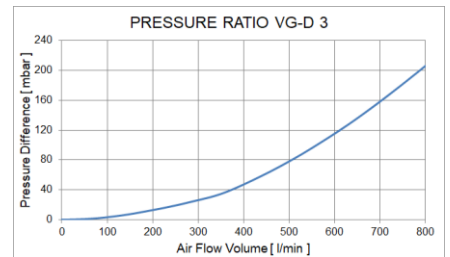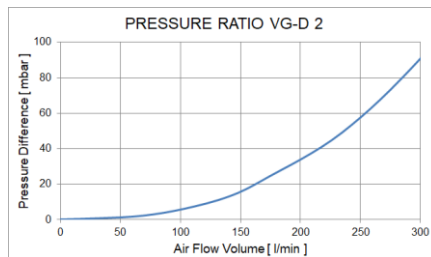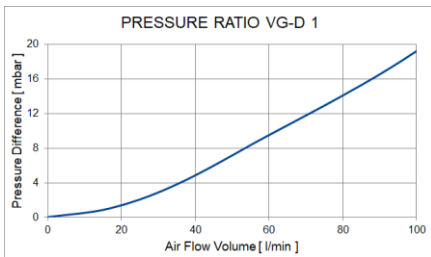

Use	Separation of pollutants
Material	Polyamide (PA), Acrylic glass, Polyvinyl chloride (PVC), FKM, Activated carbon, Silica gel Colourless
Substance	Hydraulic oil, Gear oil, Biological oil, Vegetable oil, Transformer oil, Insulating oil, AdBlue (urea), Diesel fuel, Isocyanates, Polyols, Anhydrite / ... Adhesives, Resins, Amines, PU metal catalysts, Flame retardants, Diethanolamine, Silicone
Refillable	No
Application ATEX 2014	No
Offshore Suitable	Yes
Adsorbent Quantity	Activated carbon 0,1 - 3,0 kg
Valves	No
IP Protection Class	IP 63
UV-Resistance	High
Temperature Range	-40°C ... +80°C
Corrosivity Class	C5
REACH Compliant	Yes
RoHS Compliant	Yes
Customs Tariff Number / Country of Origin	84213925 Germany

FLOW CHART

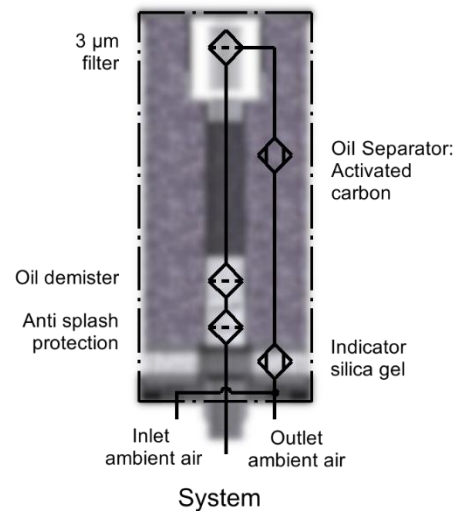

Online for download:



Adsorber, Accessories & Spare Parts

shop.giebel-adsorber.de

Order in our Online Shop
24/7

We are pleased to advise you personally - by phone, video telephony, email or chat.
+ 49 79 46 94 44 01-0 | info@giebel-adsorber.de | giebel-adsorber.de